





ADVANTAGES

- Concrete pump produced, assembled and tested in SERMAC.
- Structural verification with the Finite Element Method (FEM).
- Frame pump designed for high torsion rigidity.
- Precise assembly on 2 axles chassis.
- High precision and great versatility of boom 4 sections, folding type "ZR".
- Pipeline diameter 125 mm (5").
- Main Italian and German genuine components.
- Pumping unit with open hydraulic circuit with concrete S-valve made of iron casting.
- Easy placement in tight spaces.

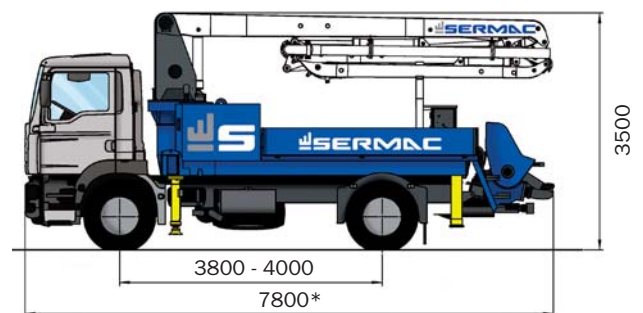

PUMPING UNIT - S8

	AS8M08-80-80	AS8M09-100-61
THEORICAL OUTPUT (MAX)* ROD SIDE	80 m ³ /h	100 m ³ /h
PRESSURE ON CONCRETE (MAX)* ROD SIDE	80 bar	61 bar
NUMBERS OF CYCLES	27 /min	25 /min
PISTONS DIAMETER	200 mm	230 mm
CONCRETE CYLINDERS	1600 mm	
S-VALVE DIMENSION	8"	
CONCRETE HOPPER CAPACITY	600 l	

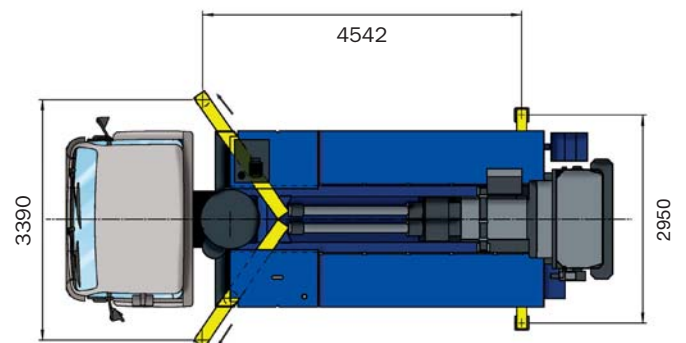

*Cannot be reached simultaneously

*Dimensions variable according to the truck assembly